

Product Description

□□□□□	□□□□□□□□□□□□□□□□
□□□	805
C□□□	□□□□□
□□□	37-46
□□□□□	2.0-2.2□□/PR
□□□	PVC□□□PVC□□
□□□	□□□□□□□
□□□	PVC□□
□□	□□CE EN ISO 20345 S5□□□□□□□□□□
□□□□	□□200□□
□□□□	□1500 □□
□□□	□1100 □□
□□	1.□ /□ /□ /□□□□□□□□□□PVC□□□ 2.□□□□□□□□□□□□□ 3.□□□□□□□□□1100□□□ 4.□□□□□□□□□□□ 5.□□□□□□□□□□□□□□□□□□□□□□ 6.□□□□□□□□□□
□□□	5□□□□□□□□□□□□
□□□	□□□□1□□□□□10□
□□□□□	50 x 30 x 48□□
G.W./N.W□□	22□□/ 20□□
□□□□	□□□□□□□□□□□□□□□□□□
□□□□□	□1□□
□□□□□	□□□□□□□□□□□□□□□□□□

Product Pictures










Certificate

Deburring



Production Process

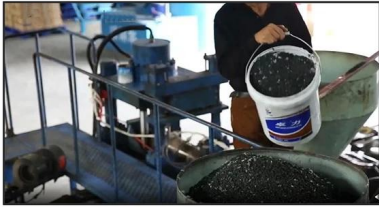

1. Mixing Materials



2. Putting Polyester Lining



3. PVC Injection



4. Open The Mould



5. Demoulding



6. Tidying



7. Printing



8. Inspection



9. Packaging

Canton Fair

Canton Fair



SAFETY SHOES



RAIN BOOTS



PROFESSIONAL SAFETY SHOE & RAIN BOOT FACTORY