

DESCRIPTION

TIGER MASTER

Model:	Tiger master 39 46 39 46 39 46 39 46 PVC 39 46
Code:	GB38
C 39:	39 or 46
39:	39-46
39 46:	2.0-2.2 kgs/pr
39:	PVC 39 PVC 39
39:	39 39 39 39
39:	PVC 39
39	CE EN ISO 20345 S5 39 39(39 39 39 39)
39 39 39	20039 39 39
39 39 39	150039 39 39
39 39	110039 39 39
39	1. 39 / 39 / 39 39 / 39 39, 39 39, 39 39 PVC 39. 2. 39 39 39 Impact & A 39 39 39 39. 39; 39 39. 3. 39 39 39 39 39 39. 4. 39 39 39 39 39 39. 5. 39 39, 39 39 39 39, 39 39 39 39 6. 39 39 39.
39:	539, 39 39 39 39.
39:	39 39 39 139 39, 39 39 1039 39
39 39:	50 x 30 x 48 cm
G.W./N.W.:	22KGS/20KGS
39:	39 39, 39, 39 39, 39 39 39
39 39:	139 39
39:	39 39 39 39 39 39 39 39 39 39 39 39.

PRODUCT PICTURES

TIGER MASTER






European standard
steel toe


VS

Ordinary iron toe

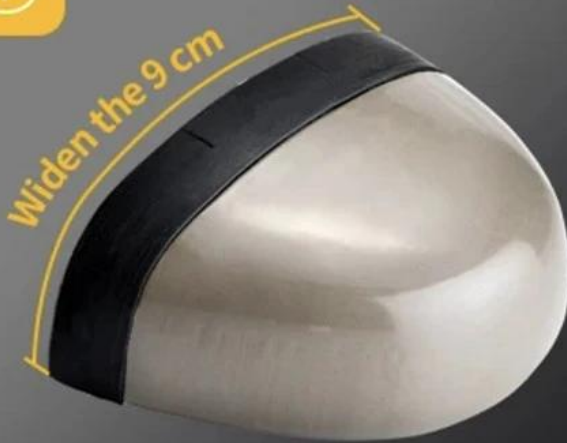

**Impact resistant
200 Joules**

- ✓ WILL NOT SQUEEZE YOUR FEET
- ✓ CAN'T GRIND YOUR FEET

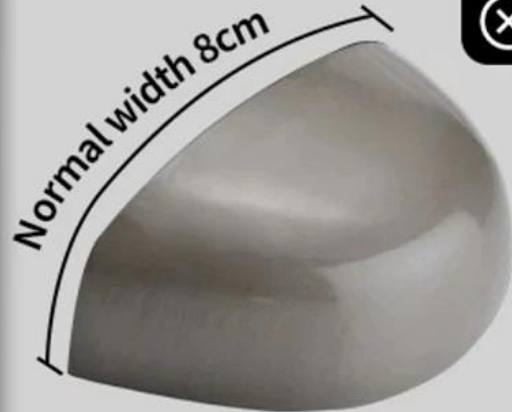

Easy to squash

- ✓ SQUEEZED FEET TEND TO RUST
- ✓ EASY TO GRIND FEET

CERTIFICATION

TIGER MASTER

QUALIFICATION DISPLAY



CERTIFICATION

TIGER MASTER

00000000 0000 PVC 00 00000. 0000 ISO 9001:2015 00 00 0000 0000000. 00 0000 00 00 00 0 0000 CE ENISO 20345:2011 0 ASTM F2413-18 0000 0000000. 00, 0000 00 00 00000000. [PPE \(000 000 000\)](#) , 00 00000 00000, 0000, 00, 00 00 , 0000/0000, 00 00 y 0000 , 00/00 0.

[illegible]

Tiger Master 0000 000000 000000. 0000 0000 00 00000 0000 000000 00000. 0 00 000 000000 00000 00000 0000 0000. 0000 00 00000 00000.



Automatic Injection Molding Machine



Puncture Testing Machine



Impact Resistant Testing Machine




**Tensile
testing machine**

Deburring



Production Process

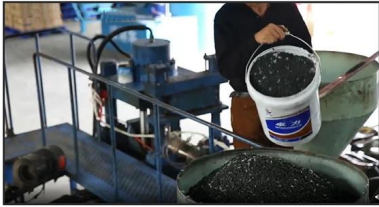

1. Mixing Materials



2. Putting Polyester Lining



3. PVC Injection



4. Open The Mould



5. Demoulding



6. Tidying



7. Printing



8. Inspection



9. Packaging

Rain Boots Application



Agriculture



Industry



Construction



Farming



Fishing



Sanitary

